


Simon

The Simon Framevent is the latest addition to our extensive range of window ventilators. Ideal for both timber and PVCu, the Framevent has been specifically developed for the volume market. Manufactured in the highest quality, U.V. stabilised PVCu, it reflects the growing market trend towards softer lines. Durable, easy to fit and fully tested, the Framevent represents the new generation of window fittings.

Framevent

Specification

- Available in 5000 mm² and 2500 mm² equivalent area models for compliance with Approved Document F 2006
- A robust smooth slim elegant rounded design
- Snap on quick fit end caps
- Positive open and close action
- Available in four colours: Standard White, Bright White, Dark Brown and Tan
- Integral flyscreen in external hood
- Available with rod control
- Can be fitted to give updraft or down-draft
- Suitable for PVCu, timber and aluminium windows
- Tested in accordance with BS EN 1026:2000 & BS EN 1027: 2000 weather performance
- Sleeves available to ensure full compliance with BS 7412:2002
- Independently acoustically tested in accordance with BS EN 20140-10:1992, ISO 140-10:1991

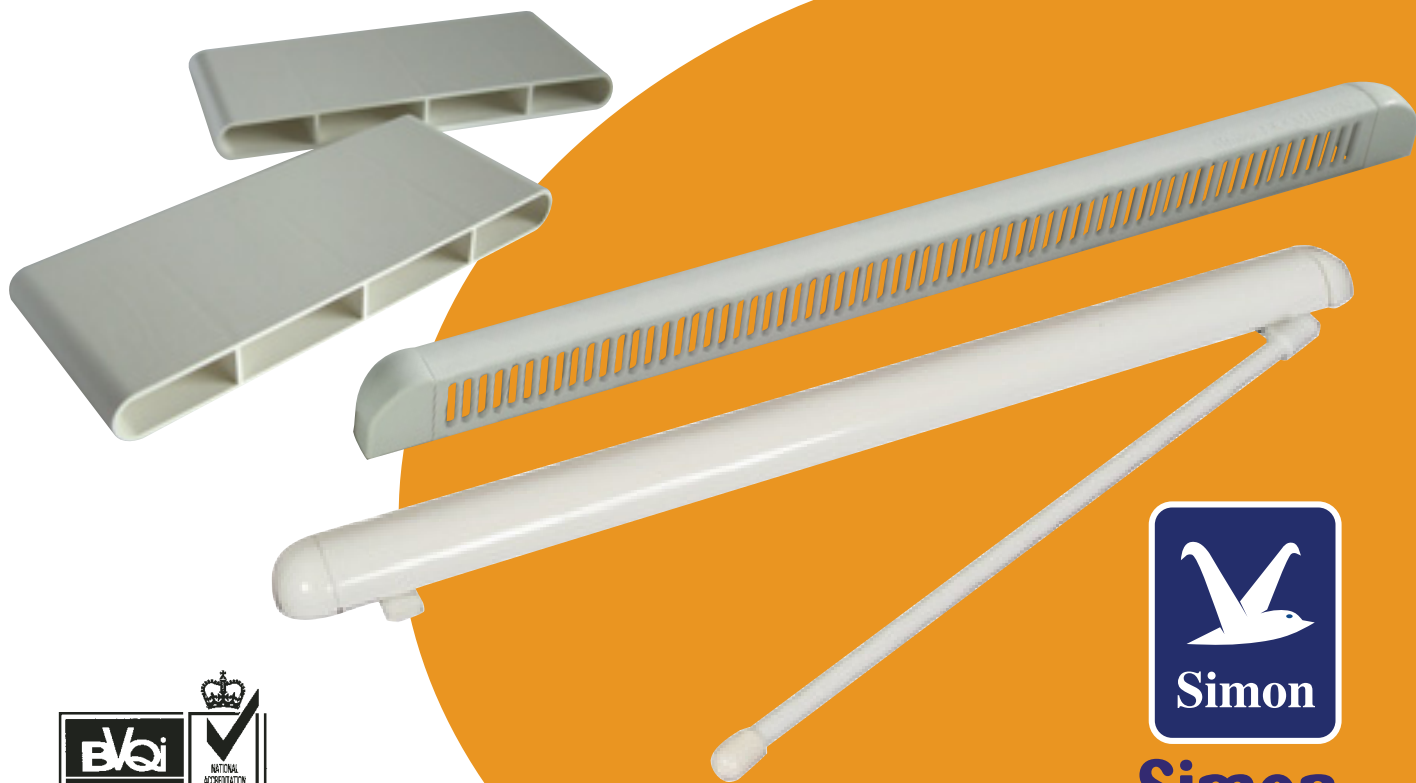

Simon
Air Management
Systems

R.W. Simon Limited System Works, Hatchmoor Industrial Estate,
Torrington, Devon EX38 7HP United Kingdom
Tel: 01805 623721 Fax: 01805 624578 E-mail: info@rwsimon.co.uk

Web: www.rwsimon.co.uk

Framevent

Fixing instructions

Route out the frame with the correct slot size and configuration for the model to be fitted. Place unit/s centrally over the slots. Fix the unit in place by using the screws provided.

If fixing the units to aluminium window frames, use the screw hole centre details shown opposite to drill pilot holes for the screws, then screw to frame as above.

Once the unit is screwed in place simply press the end caps in place on each end of the ventilator.

Performance

Independently tested to BS EN 13141-1:2004

Water tightness of 400pa.

Independently acoustically tested in accordance with BS EN 20140-10:1992, ISO 140-10:1991.

Sleeves available on certain models to ensure compliance with BS 7412:2000

| Product: | Length | EA as per BS 13141-1:2004 | Box Qty | Slot Size |
|---------------------|--------|---------------------------|---------|---------------------------------|
| Framevent 2500-10 | 400mm | 2500mm ² | 100 | 365 x 10mm |
| Framevent 5000-10 | 795mm | 5000mm ² | 50 | 2x (365 x 10mm) + (35mm land) |
| Framevent 2500-12.5 | 400mm | 2500mm ² | 100 | 330 x 12.5mm |
| Framevent 5000-12.5 | 795mm | 5000mm ² | 50 | 2x (330 x 12.5mm) + (35mm land) |
| Framevent 2500-15 | 300mm | 2500mm ² | 100 | 245 x 15mm |
| Framevent 5000-15 | 595mm | 5000mm ² | 50 | 2x (245 x 15mm) + (35mm land) |

Rod control available on the following models:-

Framevent 2500 - 10
 Framevent 2500 - 12.5
 Framevent 5000 - 10
 Framevent 5000 - 12.5



Airflow rates quoted are for when the units are fitted in accordance with manufacturers recommendations. Tested in accordance with BS EN 13141-1:2004

R.W. Simon Limited System Works, Hatchmoor Industrial Estate,
 Torrington, Devon EX38 7HP United Kingdom
 Tel: 01805 623721 Fax: 01805 624578 E-mail: info@rwsimon.co.uk

Simon
Air Management
Systems