


DURATION

Egress Easy Clean with Restrictor

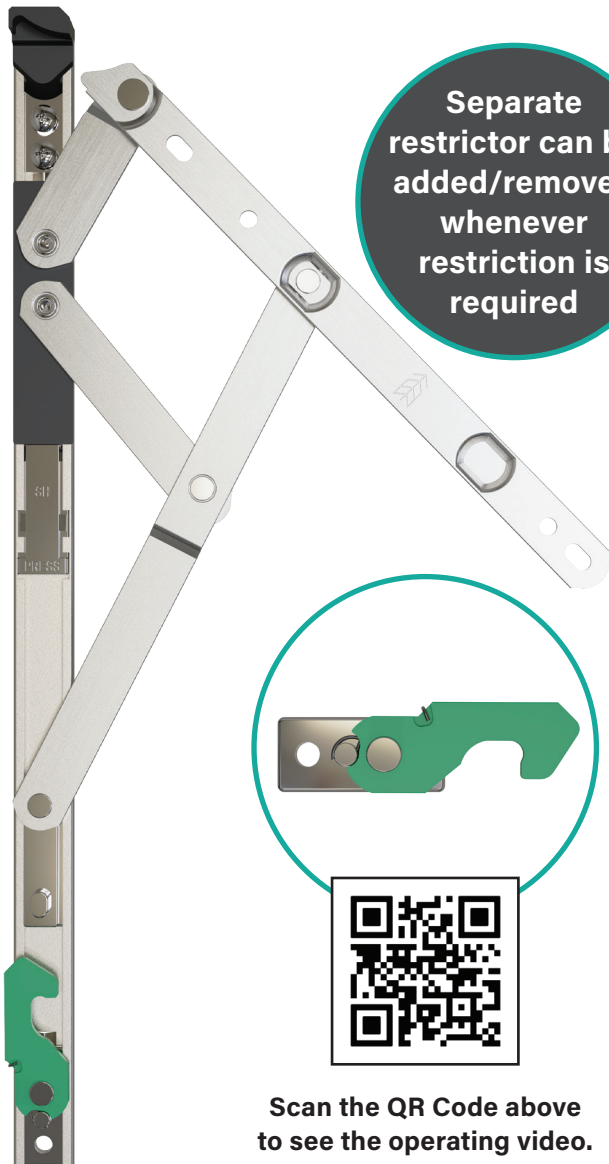

Features

- Available as a standard 84°–88° egress easy-clean friction stay, with the option to upgrade with an integrated restrictor.
- Features a unique patented restrictor design with automatic engagement, which can be released to allow full 84°–88° opening.
- Restrictor can be fitted/removed at any stage during the window's lifecycle, with no additional screws required and no unsightly frame holes left behind.
- Simple push-button operation allows access to the easy-clean mode.
- Available in 12", 14" and 16" sizes.
- Available in 13mm and 17mm stack heights.
- Suitable for use with PVC-U and aluminium window systems.
- Manufactured in Ferritic or Austenitic Stainless Steel.



Designed by and exclusive to Total Hardware
www.totalhardwareltd.co.uk




DURATION




Testing & Accreditations

- Tested to BS EN 14351-1:2006 for safety devices.
- Tested to 20,000 opening and closing cycles.
- Tested to BS6376-2.
- PAS 24 compliant with the addition of a suitable hinge protector.

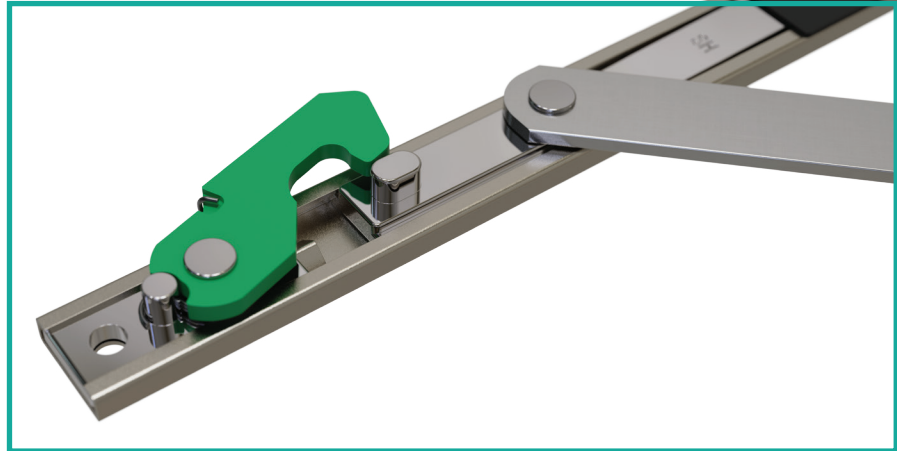

Packaging

- Purchased in pairs of 25.

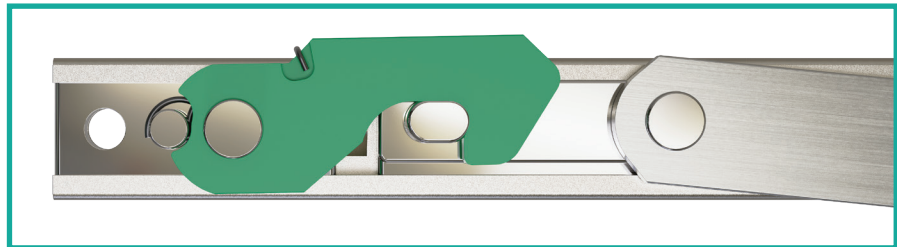

Technical Data

Stay Part Code	Description	Max Height	Max Width	Max Weight	Full Opening Angle	Restricted Opening Angle
17mm Stack Range						
SH12EGE17RES	12" Egress e/clean rest'r	1200mm*	600mm	22kg	89°	15°
SH14EGE17RES	14" Egress e/clean rest'r	1200mm*	650mm	24kg	82°	14°
SH16EGE17RES	16" Egress e/clean rest'r	1200mm*	750mm	28kg	88°	10°



Scan for more information.



Designed by and exclusive to Total Hardware
www.totalhardwareltd.co.uk

