


DURATION MAX QUATRO

Heavy Duty, Restricted, Egress Easy Clean Friction Hinge

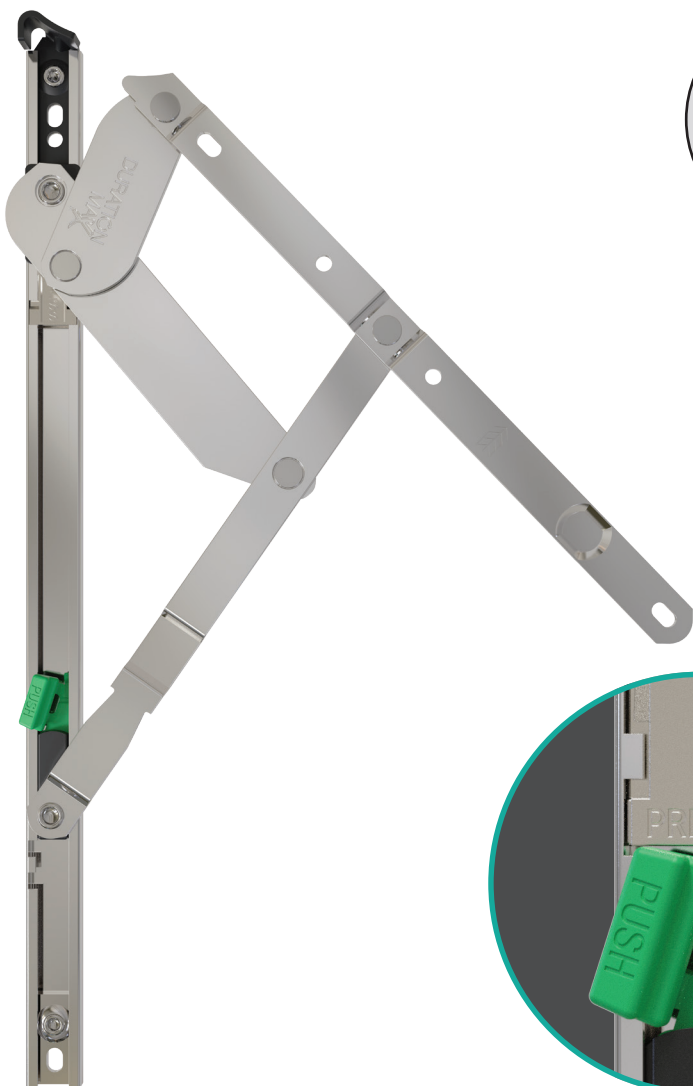

Features

- Restricts the initial window opening for enhanced safety.
- Visible green restrictor button allows the restriction to be overridden and the window moved into Egress mode.
- Egress function automatically resets when the window is closed.
- Simple Easy Clean operation – depress the slider button in the track to allow the sash to slide into the Easy Clean position.
- Easy Clean function automatically resets when the window is closed.
- Heavy-duty construction for enhanced weight carrying capacity.
- Maximum sash weight capacity of 50kg.
- Stainless steel end cap for enhanced durability and performance.



Designed by and exclusive to Total Hardware
www.totalhardwareltd.co.uk



DURATION MAX QUATRO



Operation

Restricted to Egress

- Push green restrictor button and move the window into the Egress position. When the window is closed, the restrictor automatically resets and re-engages the next time the window is opened.

Easy Clean

- Depress the slider button in the track and slide the sash along to move the window into the Easy Clean position. Simply closing the window automatically resets the hinge ready for normal operation.

Specification

- Restriction tested to BS EN 14351.
- Tested to 20,000 cycles and compliant with BS 6375-2.
- Complies with Building Regulations Part B: 2013 for fire escape.
- Complies with BS 9991:2011 for fire escape.
- Complies with BS 8213-1:2004 – Code of Practice for Safety in Use and Cleaning.
- Will meet PAS 24 requirements as part of a casement window.



Technical Data

Description	Max Height	Max Width	Max Weight	Cycles
12" Friction Hinge (BS EN 1191:2012)	1450mm	700mm	35kg	20,000
14" Friction Hinge (BS EN 1191:2012)	1450mm	1000mm	50kg	20,000



Scan for more information.



Designed by and exclusive to Total Hardware
www.totalhardwareltd.co.uk

